


PRO-MAX SERIES

ELECTRIC POLYCHAIN BELT DRIVE

Distributed By:
R.J. Sayers Distributing, LLC
21020 Cambodia Ave
Farmington, MN 55024
651-460-6101 / 800-456-9840
info@sayerswashsystems.com

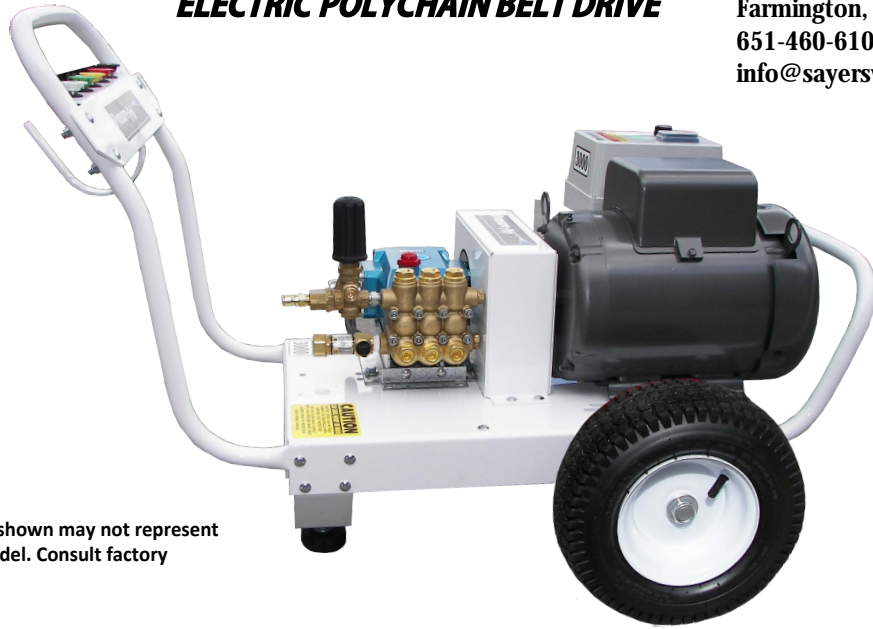

*Picture shown may not represent exact model. Consult factory

B4030E1G403

4GPM@3000PSI

230V/1PH/33A 7.5 HP



TSS1511 Pump

MARATHON® L3709T Motor
ELECTRIC

Standard Accessories

- ◆ Gun/wand assembly w/quick connects
- ◆ 50' high pressure hose w/quick connects
- ◆ Chemical injector assembly w/quick connects
- ◆ 4 color-coded QC spray nozzles
- ◆ 1 color-coded QC chemical nozzle

Available Options

- ◆ Skid Mount – Precede model with S/ Example: S/B5535E3G303
- ◆ Block Mounted K7 Unloader
- ◆ 3500 psi max
- ◆ Auto Start/Stop (230V)
- ◆ Auto Start/Stop w/time delay-consult factory
- ◆ 460V available – consult factory

NOTE: Review specs for models with Auto Start/ Stop options as these units are custom made and NONCANCELABLE & NONRETURNABLE.

Standard Features

- ◆ Revolutionary aircraft grade aluminum frame with dual handles (no welds to fail)
- ◆ Lifetime frame warranty
- ◆ Easy access tip holder/gun holder/hose hanger on handle
- ◆ Epoxy powder coated finish
- ◆ 10,000 hour rated Gates polychain cogged belt (two year warranty)
- ◆ 50 mesh inlet water filter
- ◆ Adjustable pressure unloader
- ◆ Oversize pneumatic tires
- ◆ Dual spring cushioned shock absorbing feet
- ◆ 3/4" cold-rolled steel threaded axle
- ◆ Low speed pump and thermo-sensor (prevents overheating in bypass mode)
- ◆ TEFC Commercial/Industrial motors
- ◆ Mag Starter assembly, w/thermal overload, and start-stop buttons in NEMA enclosure w/12 μ power cord (no plug)

NOTE: 8 GPM units set up for tank feed.

Pressure-Pro®