

ProTowWash® – Transport Trailer with 270 Gallon Tank

The T300 tandem axle trailer, with your choice of pressure washer, is a fully integrated self-contained pressure washing system. The 270 Gallon water tank provides ample water to sustain many remote-cleaning requirements. The super duty torsion axle suspension provides the smoothest ride available and prevents damage to equipment from a harsh ride. The enhanced wheel travel (up to 300% over conventional trailers) keeps road vibration and rattle to a minimum. Long life, rugged, durable and dependable service—engineered into the T300 Series Pro Tow Wash

TECHNICAL DATA	T300N	T300EE	T300S
MACHINE CAPACITY	To be ordered with a hot water skid (up to 1100# total)		
SUSPENSION / AXLE	Two 3700# Torsion Axles—Up to 300% more wheel travel over conventional trailers		
TRAILER BRAKES	None	Electric Brake, both axles***	Surge Brakes
WHEEL / TIRE	4 - 13" Spoke Rims, 5 Lug / ST175/80D/13 Tires, 1100 Pounds capacity per tire		
COUPLER / TONGUE	2" Ball Coupler, Dual 3/8" Safety Chains		
VEHICLE HITCH / GVWR	2" Ball Hitch, Class IV 6000 Pound Rated, 20" to top of ball when trailer is attached 4400# GVWR – requires 2", class III ball on tow vehicle		
FENDERS	12 GA steel fender with recessed tail light mount and license plate light		
LIGHTS	Recessed Rubber Grommet Snap-In, DOT Approved		
WIRING	4 way flat connector	7 way molded connector	4 way flat connector
JACK	Bolt-On Swing Up Jack 1500# Capacity With Large Swivel Caster 8" Diameter		
WATER TANK	270 Gallon total Capacity, Seamless Polyethylene, 10" lid; Garden Hose Fill Fitting		
TANK DRAW / FILTER	1½" 80 Mesh Strainer with Drain, 1½" Fast Drain Valve		
CHASSIS CONSTRUCTION	12 GA Steel Frame with Structural Tube Spine, Powder Coat Wrinkle Finish		
WEIGHT/DIMENSIONS	761# (w/o machine)	893# (w/o machine)	775# (w/o machine)
	130" Long x 68" Wide x 61" High		

Note: Specifications subject to change without notification and may vary due to ambient conditions.

Note: Shipped to distributors only, not available to drop ship – Assembly Required


*** Trailers with electric brakes must include a battery power source. We recommend installing a pressure washer equipped with a battery. Fenders and tires require installation if being shipped.

Featuring:

- ✓ **Rugged Fender:** Can be used as a step for tank access, will not bend, supports tank.
- ✓ **Recessed Tail Lights:** Will not break off, rubber isolates to reduce bulb failure.
- ✓ **Storage Areas:** Integrated storage tube for spray wands and large (47"x22"x10") storage box at the back of trailer for hoses and other accessories.
- ✓ **Inlet Plumbing:** System Engineered to prevent pump damage caused by cavitations & contamination

Options...

Hose Reels, Lunette eye hitch, Custom trailer color (CTRLR), Front Bucket Rack (ACR02), 3-way ball valve (AW006), Light Bar rack (HLB98), High water tank shutoff (VVF18), Low water shutdown (AW410)-installed, Sand hopper, Hydro Vacuum wastewater recycle (AZV), 12v Chemical sprayer with 40gal tank (AC440), Locking storage lid option (ATH50)

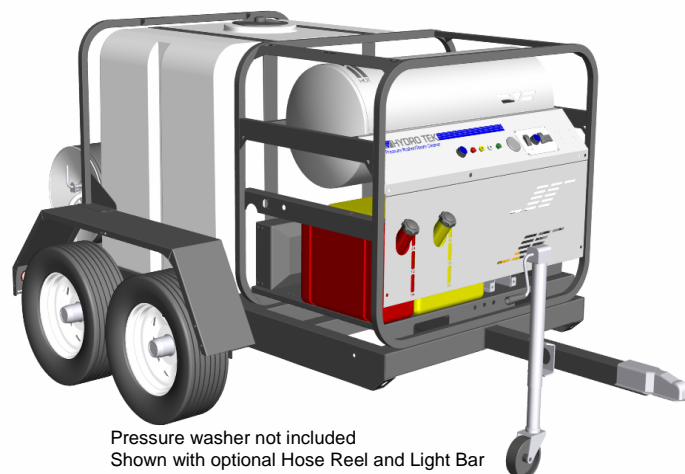

TO: _____

COMMENTS: _____

YOUR PRICE: _____

DISTRIBUTED BY: R.J. SAYERS DISTRIBUTING, LLC

21020 CAMBODIA AVE - FARMINGTON, MN 55024

800-456-9840 / 651-460-6101 / info@sayerswashsystems.com

***WARNING:** Trailer brakes and a breakaway switch are recommended and required on the road in most states if the trailer weight exceeds 1500 pounds gross. Check your states requirements.