
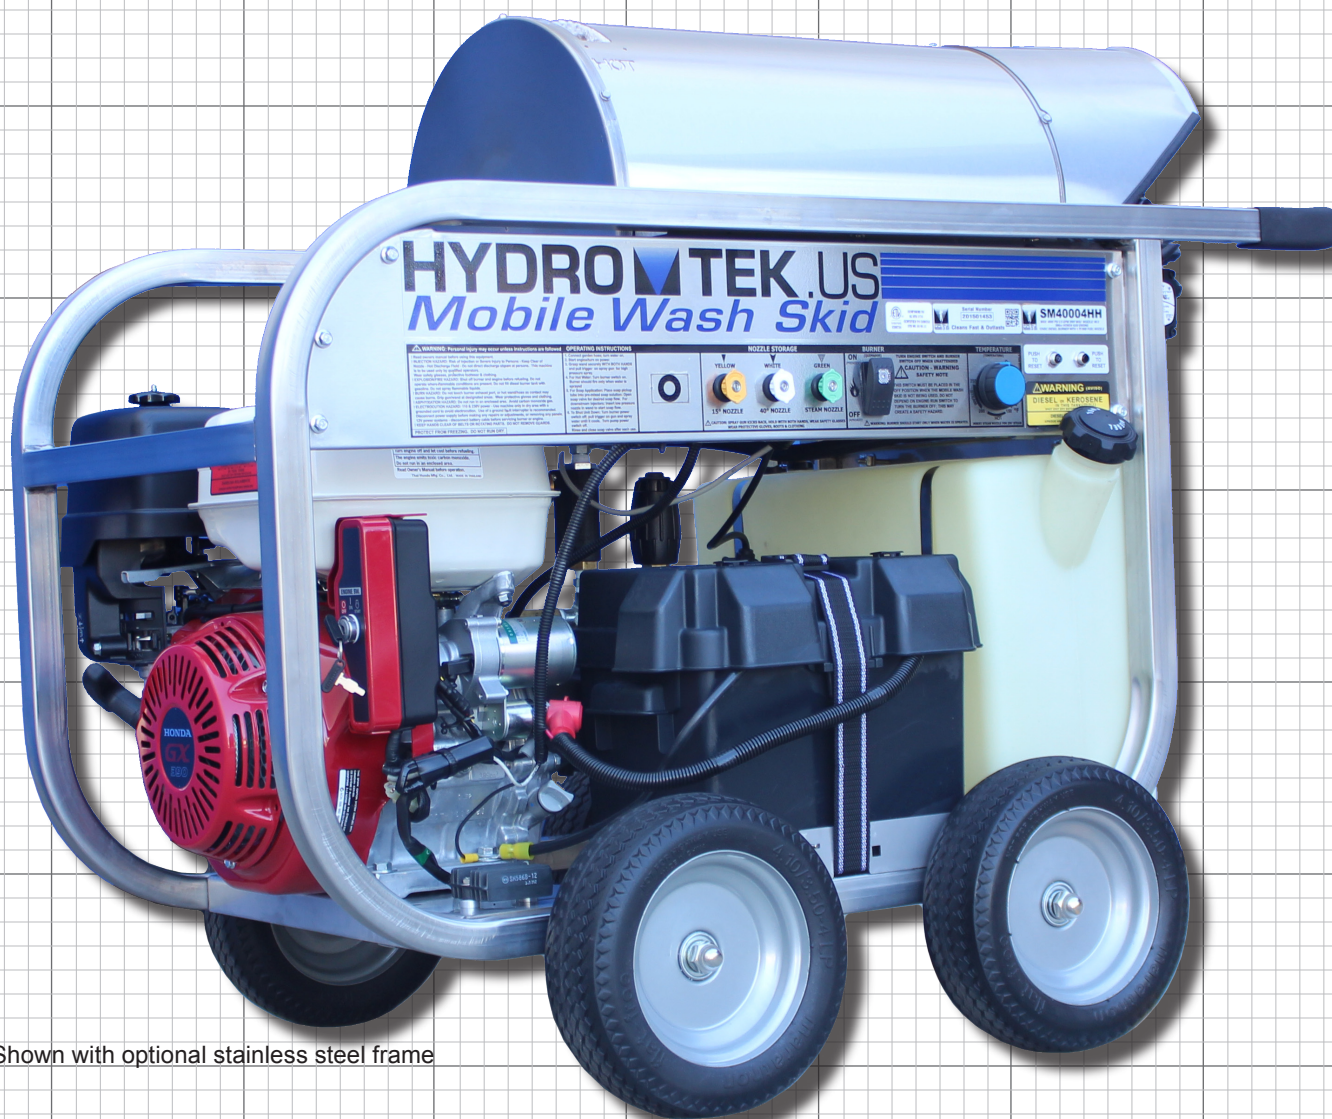


SM PORTABLE WASH SKID

SM SERIES: DIESEL HEATED, GAS ENGINE

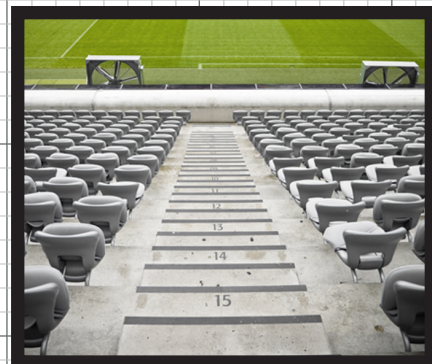

Shown with optional stainless steel frame

YOUR COMPACT & PORTABLE SOLUTION TO TACKLE GRIME

HYDRO TEK

PORTABLE WASH SKID

HOT/COLD/STEAM - GAS ENGINE: with 12-volt diesel burner

SM
SERIES



■ Rugged Steel Frame:

Hydro Tek's 1 1/4", heavy gauge steel frame is durable for rough terrain and has integrated handles for maneuverability. (Shown with stainless steel frame option)

□ Stainless Steel Panel, Coil Housing, and Burner Cover:

These rugged and durable panels offer lifetime rust and corrosion resistance and keep your machine looking like new for years to come.

□ Simple to Use Controls:

Lighted rocker switch, adjustable thermostat and other controls are located on an easy to reach panel. Includes a panel mounted, resettable circuit breaker to protect the electrical system of your pressure washer.

■ Commercial Engines:

These single cylinder, air cooled, commercial Honda engines are fuel efficient and easy to start. Electric start engine on SM40004HH, Pull start engine on SM30003HH.

■ Open Frame Design:

The open design allows for quick access to all components for fast refueling and periodic maintenance.

■ Fuel Tanks:

The Honda engine powered wash skid has an integrated unleaded fuel tank. The burner diesel tank is a heavy duty "roto-molded" rust free tank with fuel filter to protect against contaminated diesel fuel.

■ Nonintegrated, Remote Mounted Unloader:

The unloader is separate from the pump, nonintegrated, eliminating heat failure and vibration.

■ SpiraLast™ Coil:

The coil is a Hydro Tek manufactured SpiraLast™ heating coil. Robotically fused 1/2" schedule 80 steel pipe is cold rolled to protect the steel pipe from fatigue and the spiral coil is then surrounded by ceramic insulation and stainless enclosure with double-wall end caps. Ask your dealer about the Lifetime Coil Warranty.

■ Portability:

The SM Series comes standard with four airless tires for moving the machine right to your wash site. Maneuver through glass, nails and other sharp job site objects worry & flat free.

■ Flexible, high intensity 12V Diesel Burner System:

Sophisticated 12V burner system transforms available power from system to fire the diesel burner. This efficient burner system, with PowerLight ignitor, provides maximum burner performance. No outside power source is required.

■ Direct Drive Pump:

Triplex, ceramic plunger pumps for a long life of industrial duty use.

■ More Standard Features:

- Burst disc technology for operator safety
- Adjustable temperature up to 250°F
- Heavy duty wand/gun, 50' high pressure hose, quick release nozzles
- Snap lid battery box



Shown with optional stainless steel frame



Specifications

Model	PSI	GPM	Temp.	CC	Engine
SM30003HH	3000	3.0	250° F	270*	GX270 Honda Gas
SM40004HH	4000	3.5	250° F	389	GX390 Honda Gas

* pull start engine

Specifications may vary, consult factory for custom models.

Dimensions: 36"l x 28"w x 37"h

Optional Accessories...

Hour meter, downstream soap injection kit, stainless frame option, sealed AGM battery, Frame-mountable, pivoting stainless hose reel (requires jumper hose)



HYDRO TEK
CLEANING EQUIPMENT MFG.

2353 Almond Ave. Redlands, CA 92374
phone 800.274.9376 or 1.909.799.9222
www.hydrotek.us fax 909.799.9888

SM SERIES 7/15 Hydro Tek ©

Distributed By: R.J. Sayers Distributing, LLC
21020 Cambodia Ave
Farmington, MN 55024

800-456-9840 / 651-460-6101 / Email: info@sayerswashsystems.com